
## EVERYONE WANTS IT. WE'VE GOT IT.

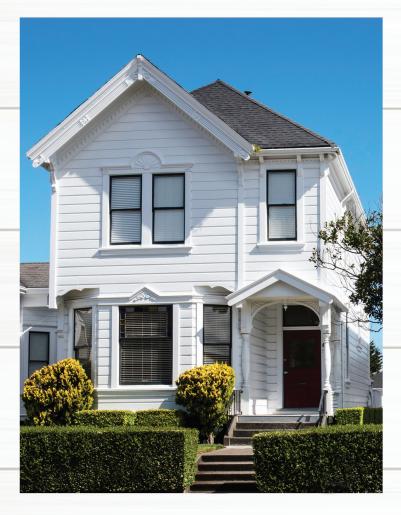

V SHIPLAP NAILING METHOD Horizontal or Vertical Siding

For all V Shiplap patterns, face nail

For 6-inch wide V Shiplap, the nail location should be one inch from the

For wider patterns, position nails one

quarter the width of the material in

with two siding nails per bearing.

(side view)

overlapping edges.

from each edge.

Stud

Sheathing

Building

Nail must

penetrate

8-inch

pattern


shown

solid wood

paper

**CLEAR REDWOOD FINGERJOINT PRIMED SHIPLAP** is ideal for reconstruction and remodeling projects where matching an existing, exterior shiplap pattern is necessary. It may also be used in interiors to achieve shiplap feature walls popular with designers and home improvement enthusiasts.

- Use for exterior Siding or interior Paneling
- Shiplap stocking patterns are 793 and 794
- All other pattern stock available via special order
- Boards are surfaced one side, two edges (S1S2E)
- Factory pre-primed
- Accepts and holds paints and other finishes extremely well
- Redwood is naturally resistant to decay and termites
- Redwood performs well under fire exposure with a Class B flame spread rating
- Humboldt Sawmill offers a consistent, high-quality supply source from 440,000 acres of Forest Stewardship Council<sup>®</sup> (FSC<sup>®</sup> C013133) certified timberlands in Northern California

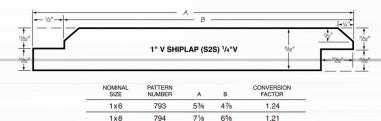

**To order or for more information,** please contact your Humboldt Sawmill Sales Representative.

Additional support available: Marketing@MendoCo.com (530) 668-0449





GetRedwood.com